

AS-915

内置无源分频器驱动的两音路全频音箱

Built-in Passive Crossover Drive Two Full-range Speaker Sound

适用范围 Application

剧场、礼堂、多功能厅、KTV 房间、音乐酒吧等声音重放要求很高的场所
High Standard Occasions Such As Mobile Performance, stadium ,theater,lectur
Ehall And Multi Functional Meeting Rooms


低音频段补强 Reinforcing Bass Frequencies

若需要延展低音频段,增强音乐感,可适配 AS-118S 或 AS-218S 超低频音箱
If You Need To Extend The Bass Frequencies And Enhance The Sense Of Music,
You Can Fit AS-118S or AS-218S SUBwoofer



音箱技术参数 Technique specification

Drivers	单元组成	LF 低频:1x15" /3"Voice-coil (75mm 音圈) /Φ200mm 钕磁 HF 高频:1x14" /3"Voice-coil (75mm 音圈) /3"复合钛膜/Φ170mm 钕磁
Frequency response	频率响应(-3dB)	45-19K Hz 赫兹
Dispersion (HxV)	覆盖角度 (-6dB)	80°x50°号角可 90°旋转 (Rotatable Horn)
Sensitivity	灵敏度	98 分贝/1 瓦.1 米
MaximumSPL	最大声压级	124dB/AES 连续 ; 130dB/Peak 峰值
Nominal Impedance	标称阻抗	8 欧姆 (OHMS)
Power handling	功率承受	500W(AES 额定)/1000W (节目) 2000W (Peak 峰值)
Connectors	输入连接器	2xSpeakon NL4MP
Recommended AMP	推荐功放功率	800W - 1000W @8Ω
Finish	表面处理	咖啡色环保耐磨油漆涂装 Environmentally Friendly Water- Based Wear-resistant Black Paint
Handing Position	吊装	内置多点螺丝承重吊挂和 1xΦ35mm 支撑座 Built-in Multi-point Screws Bearing Hang ing And 1xΦ35mm Support Base
Dimensions(HXWXD)	外形尺寸	690mmx450mmx460mm
Net Weight	净重	34.5kg

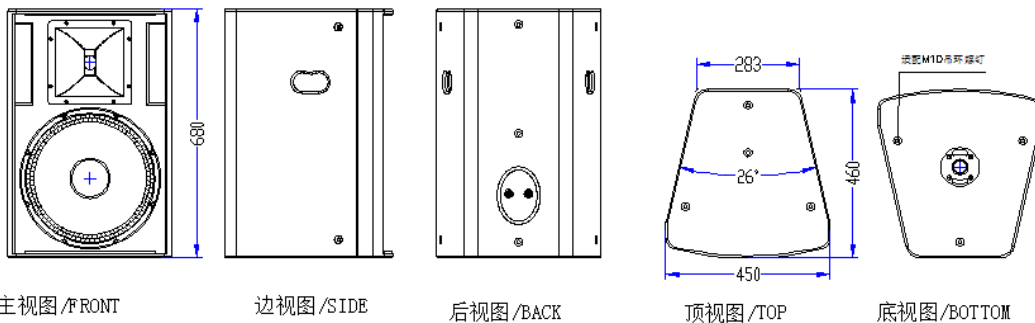

全频音箱系统 AS9-SERIES

AS9 系列音箱配置高质量的驱动器,科学的声学箱体设计,高效率、大功率。大动态;该系列低频深沉饱满,中频通透,高频细腻,音域宽阔等特点,特别适用于对声音有更高要求的扩音场所。