

# TS-SERIES

奥凯斯专业音响 WWW.AOKNICE.COM

## Model: TS-335H

内置无源分频器驱动的 **3** 单元/两音路全频音箱

Built-in Passive Crossover Drive Two Full-range Speaker Sound

### 适用范围 Application

剧场、礼堂、多功能厅、酒吧以及中小型流动演出等声音重放要求很高的场所  
High Standard Occasions Such As Mobile Performance, stadium, theater, lectur  
Ehall And Multi Functional Meeting Rooms

### 低音频段补强 Reinforcing Bass Frequencies


若需要延展低音频段,增强音乐感,可适配 SB-218 超低频音箱

If You Need To Extend The Bass Frequencies And Enhance The Sense Of Music,  
You Can Fit SB218 super Bass Speaker



### 音箱技术参数 Technique specification

Drivers	单元组成	LF 低频:2x15" /4"Voice-coil ( Φ100mm 音圈 ) /Φ220 铝磁 HF 高频:1x1.5" /3"Voice-coil ( Φ75mm 音圈 ) /3"钛膜/Φ170 铝磁
Frequency response	频率响应(-3dB)	40-18K Hz 赫兹
Dispersion ( HxV)	覆盖角度 ( -6dB)	60°x40°号角
Sensitivity	灵敏度	100 分贝/1 瓦.1 米
Maximum SPL	最大声压级	130dB/AES 连续 ; 136dB/Peak 峰值
Nominal Impedance	标称阻抗	4 欧姆 ( OHMS)
Power handling	功率承受	1200W(AES 额定)/2400W ( 节目 ) /4800W ( Peak 峰值)
Connectors	输入连接器	2xSpeakon NL4MP
Recommended AMP	推荐功放功率	1300W @8Ω
Finish	表面处理	黑色环保耐磨油漆涂装 Environmentally Friendly Water- Based Wear-resistant Black Paint
Handing Position	吊装	内置多点螺丝承重吊挂 2XΦ100mm 耐磨轮 Built-in Multi-point Screws Bearing Hang ing
Dimensions(HXWXD)	外形尺寸	1220mmx(F535,R235)mmx510mm
Net Weight	净重	59.5kg

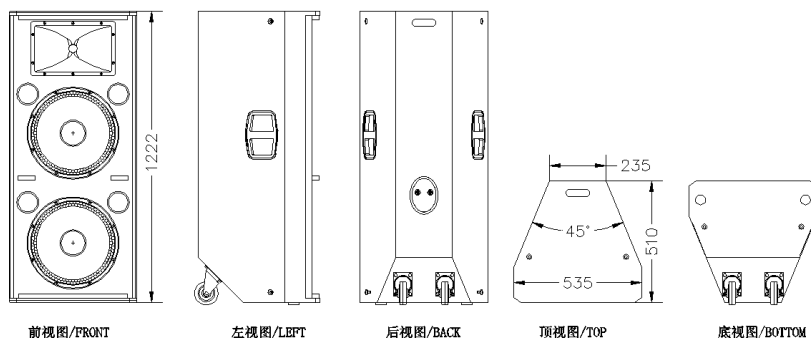

**矩阵音箱系统 TS-SERIES:** TS 系列音箱配置高质量的驱动器,科学的声学箱体设计,高效率、大功率、大动态;该系列低频深沉饱满,中频通透,高频细腻,音域宽阔等特点,特别适用于对声音有更高要求的扩音场所。