

AX-15 H

内置无源分频器驱动的 2 单元/两音路监听多功能全频音箱

Built-in Passive Divider Driven Two Way To Monitor Multi-function All Frequency Speakers

适用范围 Application

剧场、礼堂、多功能厅、KTV 房间、音乐酒吧等要求高的场所,也可作监听使用

Theater, Hall, Multi-function Hall, Ktv Room, Music Bars For High Places, Can Also Be Used for Monitoring

低音频段补强 Reinforcing Bass Frequencies


若需要增强音乐感, 延展低音频段, 可适 SB-118 或 SB-218 超低音箱

If You Need To Enhance The Sense Of Music, Extended Bass Frequencies, Can Be Adapted To SB-118 Or SB -218 super bass speaker



音箱技术参数 Technique specification

Drivers	单元组成	LF 低频: 1x15" / 4" Voice-coil (100mm 音圈) Φ 220mm 钕磁 HF 高频: 1x1.5" / 3" Voice-coil (75mm 音圈) Φ 170mm 钕磁/3" 钛复合膜
Frequency response	频率响应(-3dB)	45-19K Hz 赫兹
Dispersion (HxV)	覆盖角度 (-6dB)	80°x50°号角可 90°旋转 (Rotatable Horn)
Sensitivity	灵敏度	98 分贝/1 瓦.1 米
Maximum SPL	最大声压级	126dB/AES 连续; 132dB/Peak 峰值
Nominal Impedance	标称阻抗	8 欧姆 (OHMS)
Power handling	功率承受	600W(连续)/1200W(节目) /2400W (Peak 峰值)
Connectors	输入连接器	2xSpeakon NL4MP
Recommended AMP	推荐功放功率	800W-1300W @8 Ω
Finish	表面处理	黑色环保水性耐磨油漆涂装 (客户可选择定制颜色) Environmentally Friendly Water-Based Wear-resistant Black Paint
Handing Position	吊装	内置多点 M10 螺丝承重吊挂和 1x Φ 35mm 支撑座 Built-in Multi-point Hanging And 1x Φ 35mm M10 Screw Bearing Support Base
Dimensions(HXWXD)	外形尺寸	690mmx450mmx475mm
Net Weight	净重	38.5kg

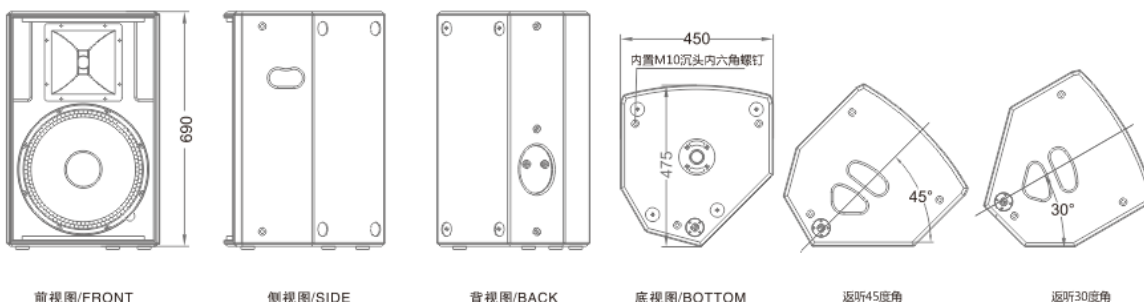

全频音箱系统 AX-SERIES

AX 系列主打多功能应用, 箱体有独具匠心的远、近监听角度设计; 声音还原真实、音域宽阔、动态良好。适用于高水准的扩声场合。