

AS-912J

内置无源分频器驱动的两音路全频音箱

Built-in Passive Crossover Drive Two Full-range Speaker Sound

适用范围 Application

酒吧、多功能厅、歌舞厅、HI 房、豪华 KTV、等要求很高的场所

Bar, Multi-function Hall, Song And Dance Halls, Hi Room, Luxury Ktv, And Other Places Of High Demand

低音频段补强 Reinforcing Bass Frequencies


若需要延展低音频段,增强音乐感,可适配 AS-3118S 或 AS-3218S 超低频音箱

If You Need To Extend The Bass Frequencies And Enhance The Sense Of Music, You Can Fit AS-3118S or AS-3218S SUBwoofer



音箱技术参数 Technique specification

Drivers	单元组成	LF 低频:1x12" /3"Voice-coil (Φ75mm 音圈) /Φ190mm 钕磁 HF 高频:1x1" /1.75"Voice-coil (Φ44mm 音圈) /Φ170mm 钕磁/1.75"PE 膜
Frequency response	频率响应(-3dB)	50-19K Hz 赫兹
Dispersion (HxV)	覆盖角度 (-6dB)	80°x50°号角, 可 90°旋转 (Rotatable Horn)
Sensitivity	灵敏度	98 分贝/1 瓦.1 米
Maximum SPL	最大声压级	124dB/AES 连续; 130dB/Peak 峰值
Nominal Impedance	标称阻抗	8 欧姆 (OHMS)
Power handling	功率承受	500W(AES 额定)/1000W (节目) /2000W (Peak 峰值)
Connectors	输入连接器	2xSpeakon NL4MP
Recommended AMP	推荐功放功率	800W-1000W @8Ω
Finish	表面处理	咖啡色环保耐磨油漆涂装 Environmentally Friendly Water- Based Wear-resistant Black Paint
Handing Position	吊装	内置多点螺丝承重吊挂和 1xΦ35mm 支撑座 Built-in Multi-point Screws Bearing Hang ing And 1xΦ35mm Support Base
Dimensions(HXWXD)	外形尺寸	600mmx380mmx400mm
Net Weight	净重	28.5kg

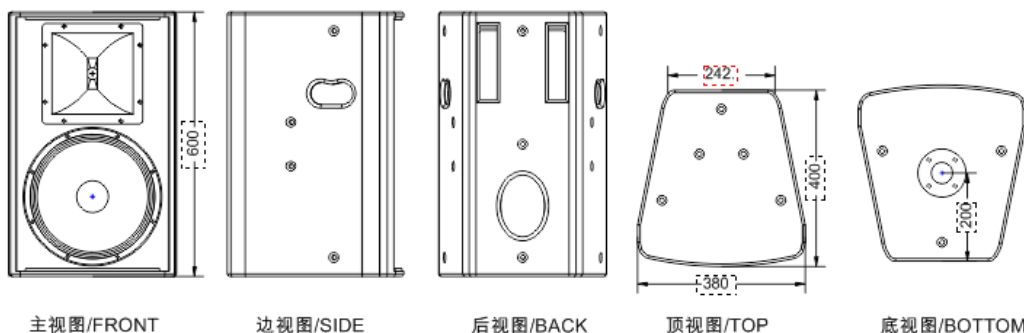

主视图/Front

边视图/Side

后视图/Back

顶视图/Top

底视图/Bottom

全频音箱系统 AS9-SERIES

AS9 系列优质驱动器适配倒相加载声学原理的箱体, 既有时尚的视觉感受, 也有完美的听觉内涵, 适用于 KTV 房间、音乐厅, 酒吧等扩声的场所。